

MBB INTERLIFT

Built to Deliver - Every Time

ILK Cantilever Lift

2200, 3300, 4400, 5500 and 6600 LBS. CAPACITY



**-OPTIMIZED-
FLEXIBILITY
DURABILITY
PROFITABILITY**

Designed to provide you a liftgate, a rear door and an adjustable dock plate, it's built for years of hard use. The adjustable platform enables safe and smooth handling in a variety of terrains.

Heavy Duty Construction:

- ◆ Bushings and zerks at all pivot points
- ◆ Ground rollers on platform
- ◆ Three piece rear impact guard
- ◆ 105 degree tilting platform maintain level through operation
- ◆ Thermo protected power pack pre-installed, wired and filled with high-grade hydraulic fluid

Built in Safety Features:

- ◆ 4 Cylinder design with hydraulic locks on cylinder port
- ◆ Cab shut off switch
- ◆ 150 A Circuit Breaker
- ◆ Solid state, programmable control system offers improved operation and fast installations

INTERLIFT, Inc .

15939 Piuma Ave., Cerritos, CA 90703

Tel (888) 774 5844

(562) 924 8218


www.interlift.net

Fax (562) 924 8318

Our wide lift arm clears pintle hitches on trucks and trailers and allows installs on wide trailer frames with minor modifications. This lift works well in double applications.

Mount frames are shipped preassembled with a three piece rear impact guard and complete with the electrical and hydraulic system to insure a fast quality installation

The stout construction together with the 4 cylinder hydraulic system coupled with cylinder locks placed directly at the port, restricts hydraulic pressure to only the cylinder. These features provide additional stability and safety for the operation.

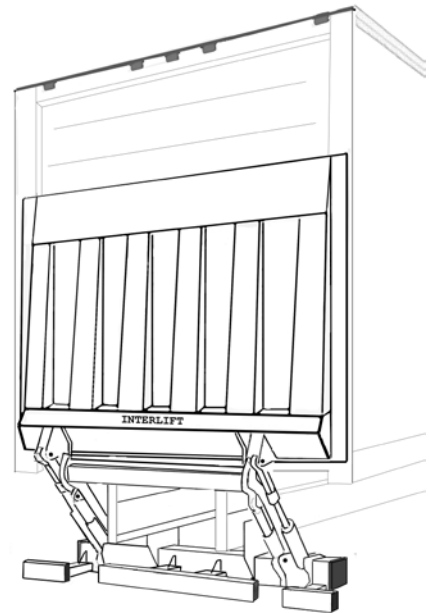


The lockable control box is pre-wired and tested. Interlift offers three different control stations:

Side mounted controls, hand held remote and optional foot controls in platforms.



The added convenience of the automatic leveling allows the platform to find the pre-set horizontal position on its own as well as tilt down at the ground only if the operator is still activating the controls. With this feature, the operator does not need to adjust the tilt angle manually.

Our large ground rollers eliminate wear on clevis and platform components when the platform touches the ground, maximizing your investment by reducing maintenance costs.

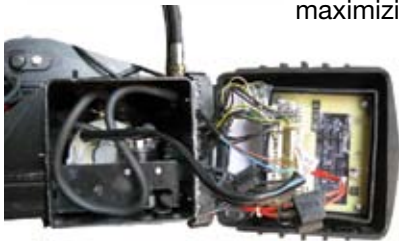

The pre-mounted power pack is fully enclosed in our mount tube for fast installation and slides out for easy inspection. This mounting system keeps the power pack safely out of harms way. By using oversized and thermo protected quality components we minimize our customers maintenance and down time.

STANDARD FEATURES:

- ◆ True Level Ride with ground tilt
- ◆ 150 A Circuit Breaker
- ◆ Cab Shut-off Switch
- ◆ Hydraulic Cylinder Locks
- ◆ Low Maintenance Bushings
- ◆ Hand held remote

LIFTGATE OPTIONS:

- ◆ Carts stops
- ◆ Flip up door
- ◆ Aluminum platforms
- ◆ Foot controls
- ◆ Swing door kit
- ◆ Rear advertising covers
- ◆ 102" wide platforms
- ◆ Reinforced platform
- ◆ Full door seal kit
- ◆ Aux. truck and trailer kit
- ◆ Custom made platforms
- ◆ Wireless Remotes

Model	Lifting Capacity (Lbs.)	Platform Depth (Inches)	Platform Width (Inches)	Bed Height (Inches)	Approx. min Weight (Lbs)	Mount Clearance
ILK 22	2200	48 & 60	94, 98	30 to 49	690	26 to 35
ILK 33	3300	48, 60, 72, 84	94, 98	36 to 55.5	1190	26 to 40
ILK 44	4400	48, 60, 72, 84	94, 98	36 to 55.5	1300	26 to 40
ILK 55	5500	48, 60, 72, 84	94, 98	36 to 55.5	1400	26 to 40
ILK 66	6600	72, 84	94, 98	40 to 60	1650	29 to 40

The ILK 33-55 is offered in two different versions, standard and low mount model which is suited for a low bed height and short overhangs.

Some of these models can be ordered with customized arm lengths for extended bed height ranges.

Sold By: [Cliffside Body Corp. - 130 Broad Avenue Fairview, NJ 07022](http://www.CliffsideBody.com) Phone: 201-945-3970 www.CliffsideBody.com

INTERLIFT, Inc.

Tel (888) 774 5844 - (562) 924 8218

Fax (562) 924 8318