

Anthony PCR Medium RailTrac[®] Gas Bottle Handling Liftgates[®]



Lifting Capacity: 2,500 lb.

Recommended for Medium Duty Straight Truck Application.

For heavy-duty or trailer applications, we recommend our Magnum RailTrac[®] Gas Bottle Liftgate.

**Power Close
Operation**



Prepped with
Steel Shot Process



Strong, Bar grating Platform — see-through for better driver visibility; allows snow and ice to fall through.

**ANTHONY
LIFTGATES, INC.[®]**

Available Models, Platforms and Capacity

Model	Lifting Capacity (lbs.)	Bed Height Min-Max	Platform		Outside Width	Approx. Shipping Wt. (lbs.)
			Bar grating Load Area	Aluminum Flip Ramp		
PCR-2500-94GB	2,500	30"-58"	90" x 30"	20" x 44"	94"	1,068
PCR-2500-94GB-AB*	2,500	30"-58"	90" x 30"	20" x 44"	94"	1,088

Cannot be used on truck bodies with swing type doors
*Above Bed Model

All specifications subject to change without notice.

Standard Features and Specifications


- Power- Open, Power-Close Platform. Effortless non-hydraulic opening and closing plus latches automatically engage as platform is raised.
- Level ride platform – maintains ride that is level with rear of truck.
- LIFETIME warranted slide runners – guarantees consistent, trouble-free service.
- Rearward folding racks
- "Bar grating" platform – withstands heavy, concentrated loads; allows snow and ice to pass through.
- Steel Pump & Cylinder Enclosure – All hydraulic components are housed in one compartment and protected from impact, debris, weather, theft, and vandalism.
- Pressure compensated flow valve – provides constant and controlled lowering speed, loaded or unloaded.
- 2+2 warranty – 2 years on mechanical components, 2 years on hydraulic system, parts and labor.
- Marine duty sealed toggle switch – operates reliably under all types of weather conditions.
- Closed hydraulic system – protects against outside dirt, moisture, & other contaminants.
- Circuit protection - 200 Amp in-line fuse protects truck wiring and power system in case of a dead short.
- Large bore double-weight hydraulic cylinder – allows system to operate at lower pressure.
- Chrome plated piston rod – keeps exposed surface free of rust and contamination to protect seals and extend service life..
- Low operating pressure (approx. 2300 psi) – increases life of components.
- EZ mount installation – shipped completely pre-assembled for fast, clean, easy installation.
- 12 volt DC drive.
- Relief valve – prevents overloading during lifting cycle.
- Factory installed hydraulic fluid – prevents contamination during installation and insures proper fluid.
- Low profile platform – 3" thick
- Heavy-duty roller chain drive – provides long operating life and greater reliability than cable drive.
- Shot blast / powder coat platform and rack for best protected and best looking appearance.
- Heat-shrink siliconed wire terminals and anti-rotation terminals – ensure positive electrical connections.
- Low pour (-70°) hydraulic fluid – excellent cold weather performance and long, trouble-free service.
- ZLC™ zero leak concept – uses machined fittings, SAE "O" rings and JIC hydraulic connections.
- Replaceable bushings in sprockets.
- Meets TMC electrical recommended practices.

Options

- Cab or ignition cut-off switch
- Hand-held control with plug and socket
- LVC - low voltage control switch (must be mounted under body standard and rubrail)
- Taillight kits
- Street-side control
- Flush-mount inside van control
- Above bed-height models
- Wireless remote control



STANDARD FEATURE – Rearward Folding Rack for unobstructed access to rear of truck body on 42" (laden truck) or higher bed height trucks.

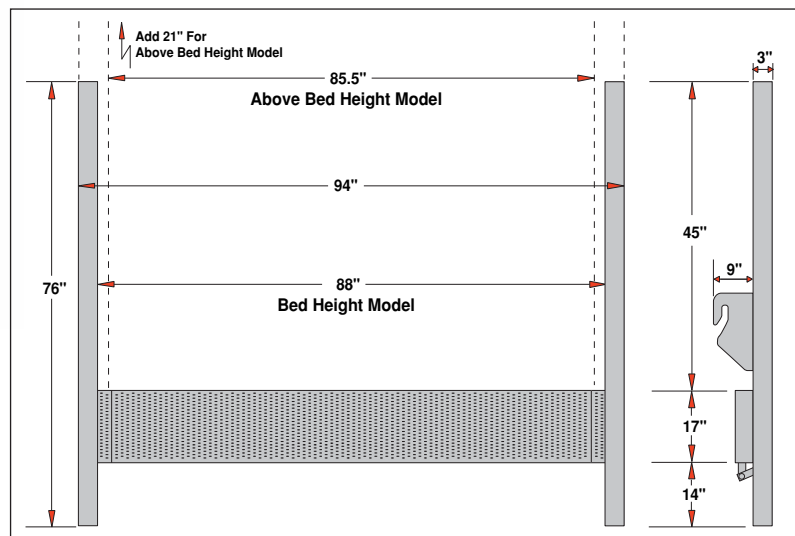

ANTHONY
LIFTGATES, INC.®

Anthony Liftgates, Inc.
1037 W. Howard Street
P.O. Box 615
Pontiac, IL 61764-0615
Phone: 815.842.3383
Fax: 815.844.3612
Toll Free: 800.482.0003
www.anthonyliftgates.com

Distributed By:

Cliffside Body Corp. - 130 Broad Avenue, Fairview, NJ 07022
Phone: 201-945-3970 www.CliffsideBody.com