



# HT50KX-25



**FULLY HYDRAULIC  
50,000 FT-LB CRANE**

## FEATURES

- ◆ 8,000 lb Maximum Lifting Capacity
- ◆ 50,000 ft-lb Moment Rating
- ◆ Fully Hydraulic Power
- ◆ Hydraulic Boom Extension 12-25 ft
- ◆ High Speed Winch: 60 ft/min
- ◆ 400° Power Rotation
- ◆ Meets ANSI B30.5 Safety Standards
- ◆ Meets OSHA 1910.180 Requirements

## STANDARD EQUIPMENT

- ◆ Capacity Overload Shut-Off System
- ◆ Anti-Two-Blocking System
- ◆ 100 ft of 3/8" Aircraft-Quality Wire Rope
- ◆ Remote Control Pendant: 25 ft Cord and Quick Disconnect
- ◆ Snatch Block with Swivel Hook Safety Latch

## OPTIONAL EQUIPMENT

- ◆ Radio Remote Controls
- ◆ Hydraulic and Manual Outrigger Packages
- ◆ Hydraulic Pumps and Reservoirs
- ◆ Mounting Pedestal for Platform Bodies
- ◆ Boom Rests

LIFTING CAPACITIES	
REACH (FT)	CAPACITY (LBS)
6	8,000
12	4,200
18.5	2,675
25	2,000

See Back Page for Complete Capacity Chart

## MINIMUM REQUIREMENTS


- ◆ 20,500 lb GVWR Chassis
- ◆ Hydraulic and Manual Outrigger Packages
- ◆ Hydraulic Requirements: 12 GPM, 25 gal Reservoir



12110 BEST PLACE  
CINCINNATI OH 45241  
8 0 0 . 2 2 6 . 2 2 3 8  
FAX 513.326.5427  
www.venturo.com

Specifications subject to change without notice.

# HT50KX - 12-18.5-25 BOOM MAXIMUM CAPACITY CHART

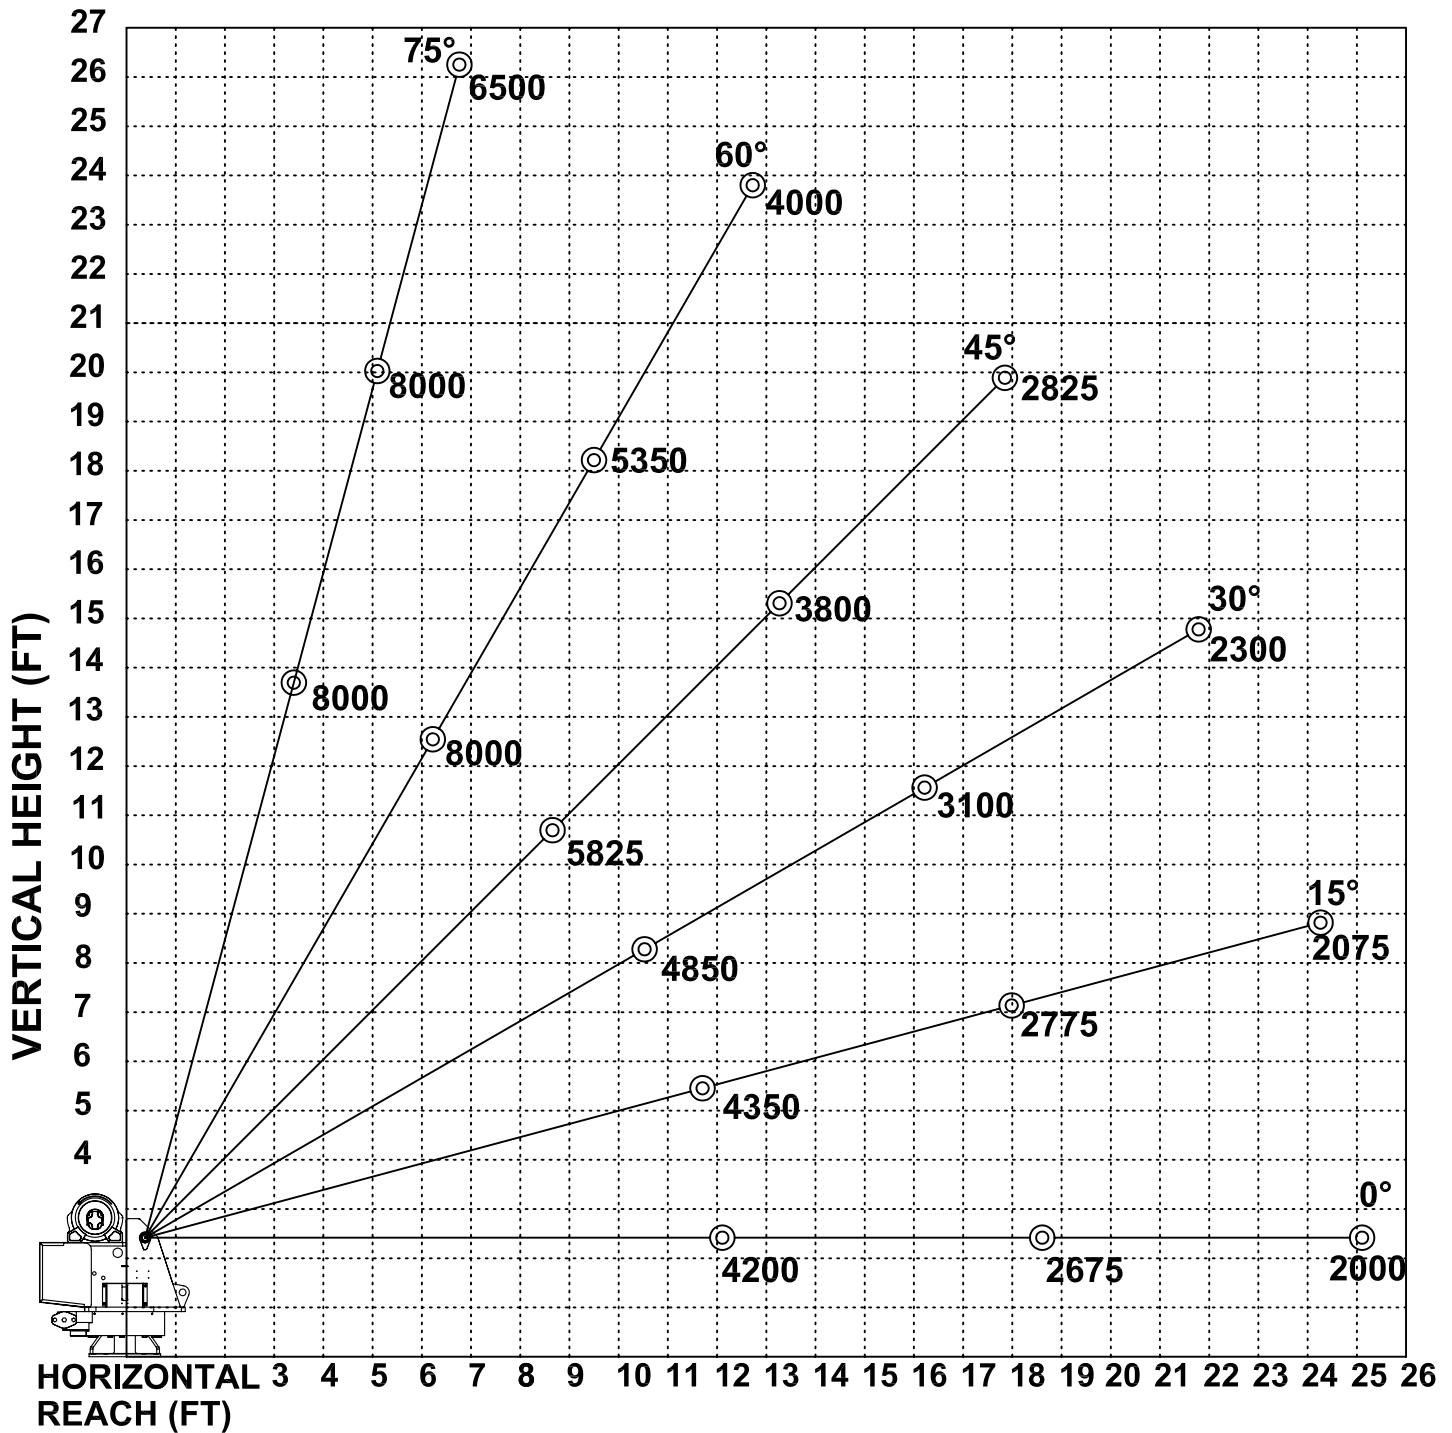

**MUST USE SNATCH BLOCK  
FOR LOADS OF 4000 LBS.  
AND GREATER**

REF. 23122